


# Roof Air Conditioner Gasket Kit (25071)

## What's In the Box

The Camco replacement Roof Air Conditioner Gasket Seal Kit consists of the following three (3) items:

- 1 self-adhesive 14" x 14" picture frame gasket
- 1 self-adhesive 1 7/16" x 18" x 7/8" thick pad
- 1 self-adhesive 1 7/16" x 18" x 5/16" thick pad

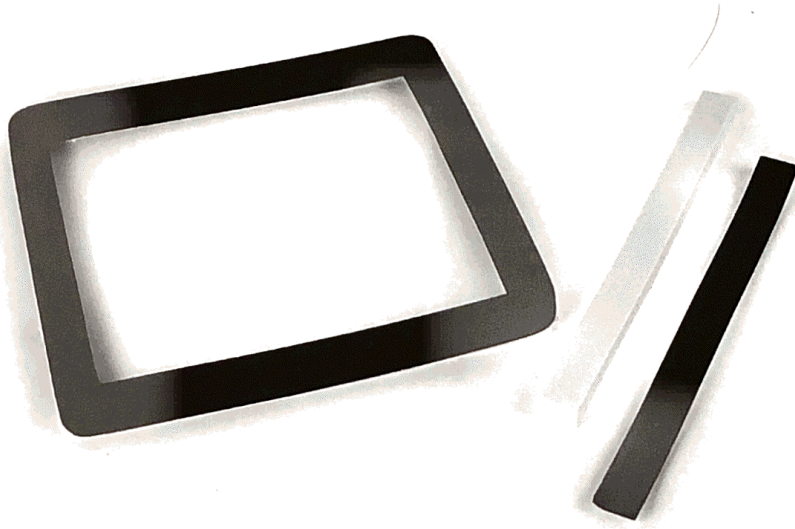

## Installation Notes

1. Always ensure that power is disconnected from AC unit before beginning work.
2. Refer to RV and/or AC manual for assembly/disassembly instructions.
3. Gaskets should always be replaced when installing or re-installing an RV roof AC unit.
4. Completely remove any old gasket material.
5. The surface on which the new gasket is being placed must be clean, dry and free of any sharp edges or burrs.
6. When re-assembling the AC unit do **NOT** over-tighten screws/bolts. Refer to RV and/or AC manual for proper installation guidelines.  
**NOTE:** Do **NOT** use any kind of liquid, tube sealant or silicon sealer. The gasket is intended to provide a compression seal.
7. Use the leveling pads provided to support the section of the AC unit that does not sit over the picture frame gasket. Refer to your RV and/or AC manual for precise placement of pads.
8. After the first week of use, check the AC unit bolts and retighten if necessary.



Camco Manufacturing, Inc.  
121 Landmark Drive / Greensboro, NC 27409  
1-800-334-2004 / [www.camco.net](http://www.camco.net)